


TECHNICAL DATA SHEET	FISUANC MT	SF-201301
-----------------------------	-------------------	------------------

DESCRIPTION OF THE PRODUCT

FISUANC MT which function to connect to structural walls separated by a vertical movement joint. They are made from stainless steel that have one end covered by a plastic sleeve to prevent adhesion to the mortar. This has a clearance of approximately 1cm to allow free movement along the horizontal plane of the wall. They have a slit on the plate (A) in order to check the correct positioning.

DIMENSIONS

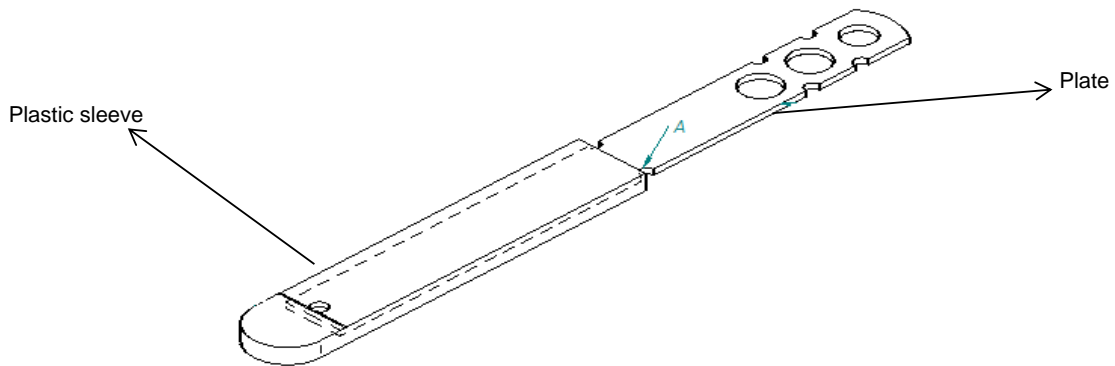

DIMENSIONS (in mm)

REFERENCE	length (l)	width (a)	height (h)	thickness
Plate	200 ±3	19 ± 1	2 ± 0.1	2 ± 0.1
Plastic sleeve	124 ±3	24 ± 1	5,5 ± 0.25	5,5 ± 0.25

QUALITY OF THE STEEL


According to standard EN 10088

COATING

R3 (Stainless steel)

CE MARKED ACCORDING TO EN 845-1



Quality control approved by: Carlos Lesmas 	PAGE. 1 of 1	DATE: 8-JANUARY-2013
---	--------------	----------------------