


DESCRIPTION OF THE PRODUCT

FISUANC DT are metal elements of stainless steel designed to link leaves of a cavity wall. They have a drip that prevents moisture crossing the cavity and reach the inner leaf. The recommended maximal distance between ties is 150mm.

Applications:

- 1- Link leaves when it is not possible to use masonry reinforcement.
- 2- Link leaves when one of them has been already built.
- 3- Link leaves for cavity walls with different type of masonry unit.

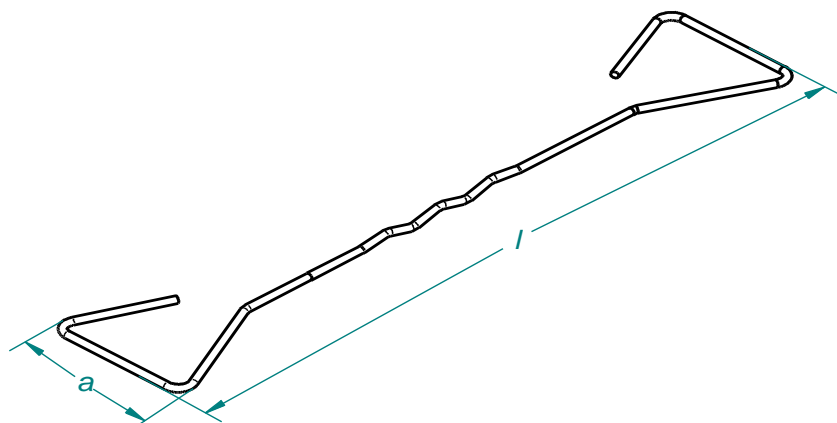

DIMENSIONS

REFERENCE	L	A	d
FISUANC DT 150	150 ±3	62 ±2	3,3 ±0,1
FISUANC DT 225	225 ±3	62 ±2	3,3 ±0,1
FISUANC DT 300	300 ±3	62 ±2	3,3 ±0,1

QUALITY OF THE STEEL

According to standard EN 10088

COATING

R3 (Stainless steel)

CE MARKED ACCORDING TO EN 845-1



Quality control:

Carlos Lesmas

