


DESCRIPTION OF THE PRODUCT

FISUFOR is a prefabricated reinforcement formed by two parallel wires that are joined by a central wire to form a trussed structure in the same plane so that the overall thickness does not exceed the diameter of the longitudinal wires.

DIMENSIONS (size in mm)

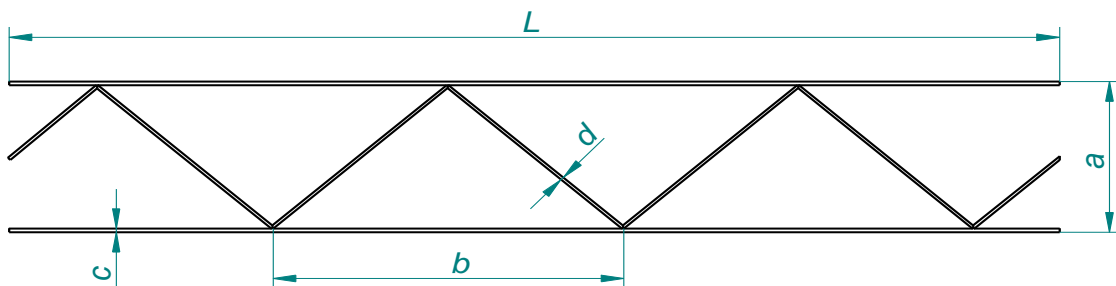

TYPE	L	a	b	c	d
4030I	3050	30	406	4	3,7
4050I	3050	50	406	4	3,7
4080I	3050	80	406	4	3,7
4100I	3050	100	406	4	3,7
4150I	3050	150	406	4	3,7
4200I	3050	200	406	4	3,7
5050I	3050	50	406	5	3,7
5080I	3050	80	406	5	3,7
5100I	3050	100	406	5	3,7
5150I	3050	150	406	5	3,7
5200I	3050	200	406	5	3,7
5250I	3050	250	406	5	3,7

TOLERANCES AND DEVIATIONS

Tolerance in length L: +45 -20 mm
 Tolerance in width: +5 - 5 mm
 Linear deviation: max. 15 mm
 Flatness: max. 20 mm

Quality control approved by:



Carlos Lesmas

PAGE. 1 of 2

Edition 2

DATE: 25 NOVEMBER 2014

TECHNICAL DATA SHEET	FISUFOR I	SF-201411
-----------------------------	------------------	------------------

PACKING

TYPE	WEIGHT UNITS (KG)	UNITS BUNDLE	BUNDLES PALLET	WEIGHT PALLET	DIMENSIONS PALLET
4030I	0,868	25	40	879	3100 x 1000 x 220
4050I	0,873	25	40	884	3100 x 1000 x 300
4080I	0,885	25	40	896	3100 x 1000 x 420
4100I	0,895	25	40	906	3100 x 1000 x 500
4150I	0,928	25	40	939	3100 x 1000 x 700
4200I	0,980	25	40	991	3100 x 1000 x 900
5050I	1,212	25	40	1223	3100 x 1100 x 300
5080I	1,224	25	40	1235	3100 x 1100 x 420
5100I	1,234	25	40	1245	3100 x 1100 x 500
5150I	1,267	25	40	1278	3100 x 1100 x 700
5200I	1,308	25	40	1319	3100 x 1100 x 900
5250I	1,358	25	30	1030	3100 x 1100 x 850

IDENTIFICATION

4030I

4 (1st figure) Diameter of the external wires (Ø4mm)

030 (2nd -4nd figure) Width of the product (30mm)

I (Letter) Coating (Stainless steel)

QUALITY OF THE STEEL

Meets the type specifications of EN 10020

COATING

R3 (Stainless steel)

CE MARKED ACCORDING TO EN 845-3

