


DESCRIPTION OF THE PRODUCT

FISUFOR is a prefabricated reinforcement formed by two parallel wires that are joined by a central wire to form a trussed structure in the same plane so that the overall thickness does not exceed the diameter of the longitudinal wires.

DIMENSIONS (size in mm)

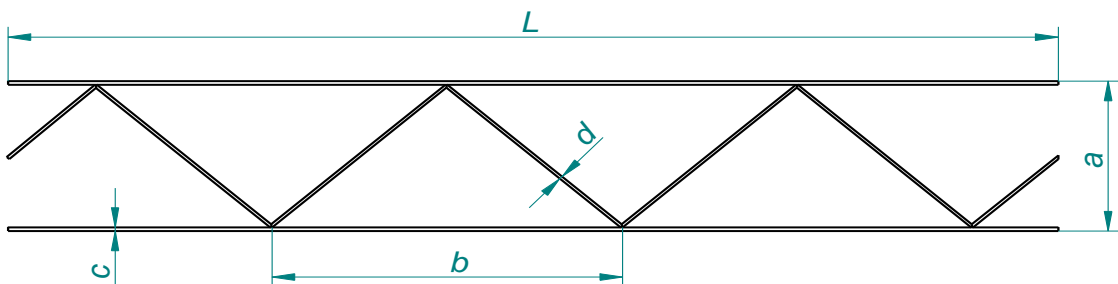

TYPE	L	a	b	c	d
3030Z	3050	30	406	3	3
3050Z	3050	50	406	3	3
3080Z	3050	80	406	3	3
3100Z	3050	100	406	3	3
3150Z	3050	150	406	3	3
4030Z	3050	30	406	4	3,7
4050Z	3050	50	406	4	3,7
4080Z	3050	80	406	4	3,7
4100Z	3050	100	406	4	3,7
4150Z	3050	150	406	4	3,7
4200Z	3050	200	406	4	3,7
5050Z	3050	50	406	5	3,7
5080Z	3050	80	406	5	3,7
5100Z	3050	100	406	5	3,7
5150Z	3050	150	406	5	3,7
5200Z	3050	200	406	5	3,7
5250Z	3050	250	406	5	3,7

TOLERANCES AND DEVIATIONS

Tolerance in length L: +45 -20 mm

Tolerance in width: +5 - 5 mm

Linear deviation: max. 15 mm

Flatness: max. 20 mm

Quality control approved by:

Carlos Lesmas



PAGE. 1 of 2

Edition 2

DATE: 25 NOVEMBER 2014

**TECHNICAL DATA
SHEET**

FISUFOR Z

SF-201411

PACKING

TYPE	WEIGHT UNITS (KG)	UNITS BUNDLE	BUNDLES PALLET	WEIGHT PALLET	DIMENSIONS PALLET
3030Z	0,509	25	40	520	3100 x 750 x 220
3050Z	0,512	25	40	523	3100 x 750 x 300
3080Z	0,520	25	40	531	3100 x 750 x 420
3100Z	0,527	25	40	538	3100 x 750 x 500
3150Z	0,548	25	40	559	3100 x 750 x 700
4030Z	0,861	25	40	872	3100 x 1000 x 220
4050Z	0,866	25	40	877	3100 x 1000 x 300
4080Z	0,879	25	40	890	3100 x 1000 x 420
4100Z	0,890	25	40	901	3100 x 1000 x 500
4150Z	0,926	25	40	937	3100 x 1000 x 700
4200Z	0,962	25	40	973	3100 x 1000 x 900
5050Z	1,205	25	40	1216	3100 x 1100 x 300
5080Z	1,217	25	40	1228	3100 x 1100 x 420
5100Z	1,227	25	40	1238	3100 x 1100 x 500
5150Z	1,260	25	40	1271	3100 x 1100 x 700
5200Z	1,301	25	40	1312	3100 x 1100 x 900
5250Z	1,348	25	30	1022	3100 x 1100 x 850

IDENTIFICATION

3030Z

3 (1st figure) Diameter of the external wires (Ø3mm)

030 (2nd -4nd figure) Width of the product (30mm)

Z (Letter) Coating (Zinc)

QUALITY OF THE STEEL

Meets the type specifications of EN 10020

COATING

R20* (Hot-galvanized, minimum 60g/m² coating)

*All our galvanisations have a minimum coating of minimum 70g/m²

CE MARKED ACCORDING TO EN 845-3



Quality control approved by:

Carlos Lesmas



PAGE. 2 of 2

Edition 2

DATE: 25 NOVEMBER 2014